

Autefa - Fehrer Needle boards - Request form

Company name:

Street/Zip code/ Country:.....


Telephone/E-Mail:

General machine information: (Information will be found on the type of plate of the needle loom)

Needle loom no.: year of construction:

Working width of needle loom: m


Fehrer 2000 (2000 needles/meter, 22 needle rows, pitch= 11.20 mm)

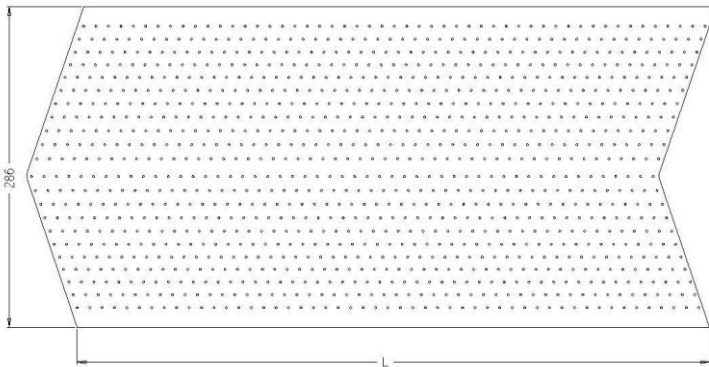

- L= 1007 mm** **L= 1119 mm** **L= 1231 mm** **L= 1343 mm**


2/4

Fehrer 3000 (3000 needles/meter, 24 needle rows, pitch= 8.00 mm)

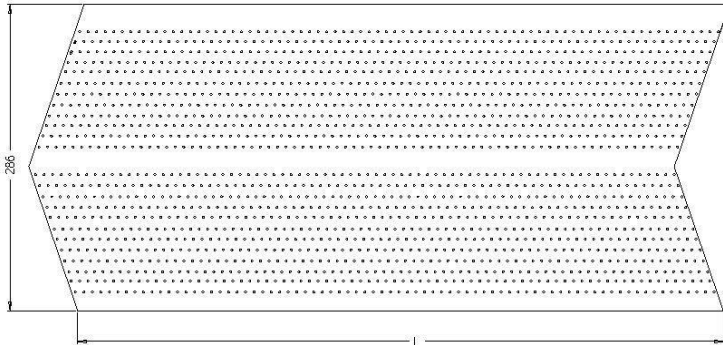


- L= 1007 mm** **L= 1119 mm** **L= 1231 mm** **L= 1343 mm**

Fehrer 5000 A (4750 needles/meter, 38 needle rows, pitch= 8.00 mm)

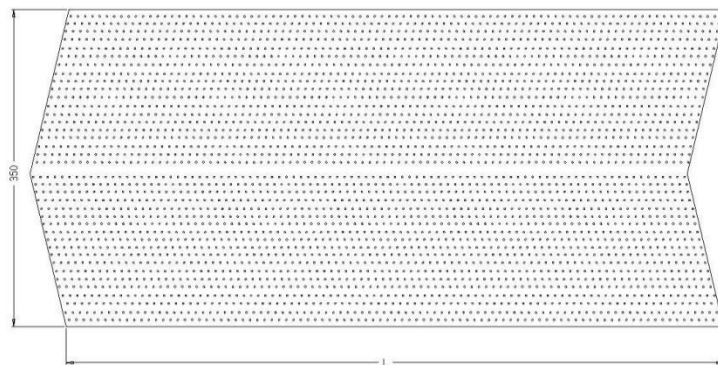


- L= 1007 mm** **L= 1119 mm** **L= 1231 mm** **L= 1343 mm**

Fehrer K1 (5000 needles/meter, random)

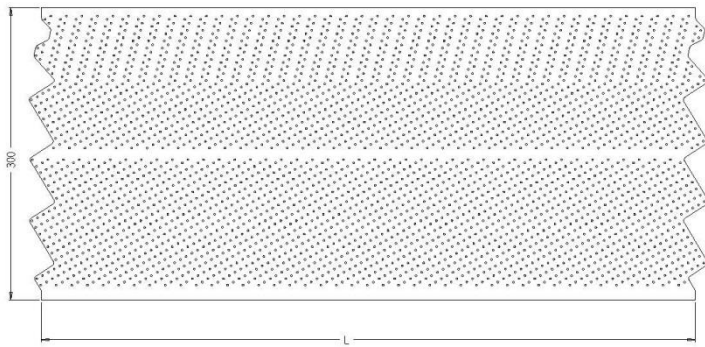

- L= 1007 mm** **L= 1119 mm** **L= 1231 mm** **L= 1343 mm**


Fehrer GBB 50 (5000 needles/meter, random)

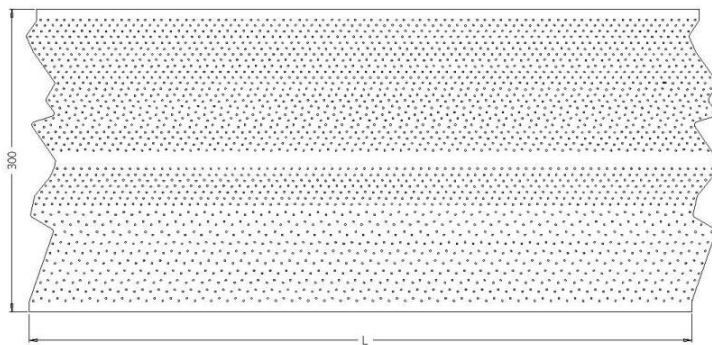

- L= 1007 mm** **L= 1119 mm** **L= 1231 mm** **L= 1343 mm**

3/4

Fehrer GBB 75 (7500 needles/meter, random)

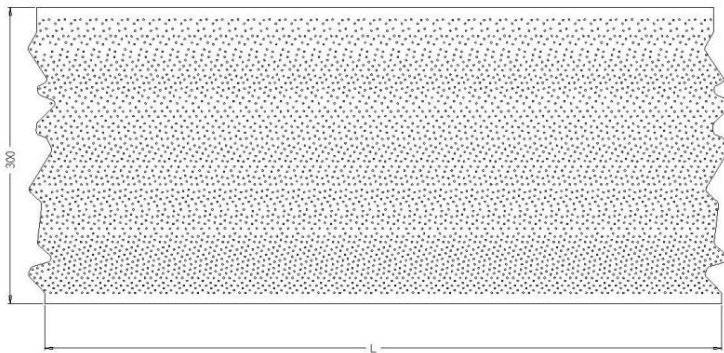

- L= 1007 mm** **L= 1119 mm** **L= 1231 mm** **L= 1343 mm**

Other: needles / meter


Needle board width = mm

- L= 1007 mm** **L= 1119 mm** **L= 1231 mm** **L= 1343 mm**

or other L = mm

End Segments:



- yes no

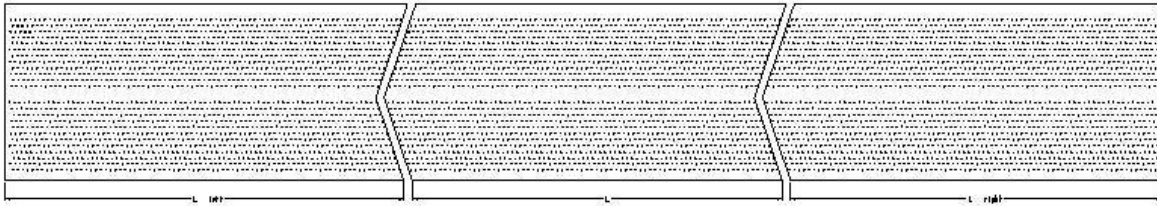

L left = mm

L right = mm

Needle board Fixation:

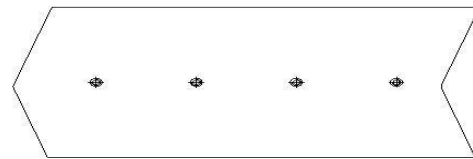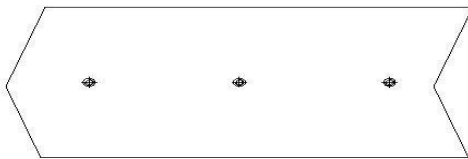

- with 3 bolts/segment
 compressed air clamping system


- with 4 bolts/segment

Material thickness:


- Magnesium Alloy 1/2" + PU coating** (needle side) (= 12.7 mm+3 mm=15.7 mm)
 Magnesium Alloy 5/8" + PU coating (needle side) (= 15.8 mm+3 mm=18.8 mm)

2/4
4/4


Execution:

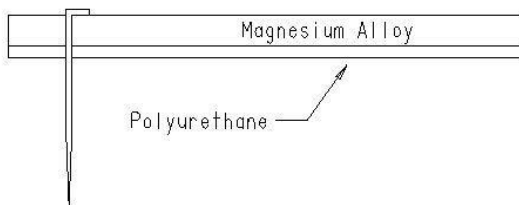


- without grooves

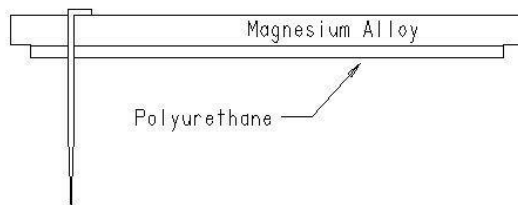


- without grooves

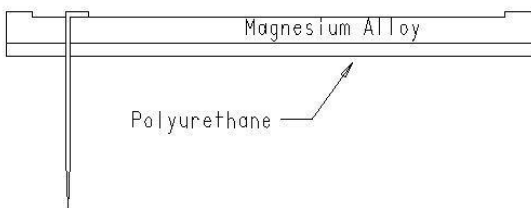


- crank side milled, without grooves

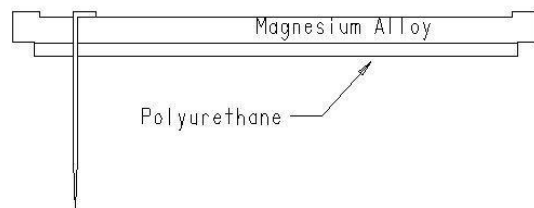

- crank side milled, without grooves

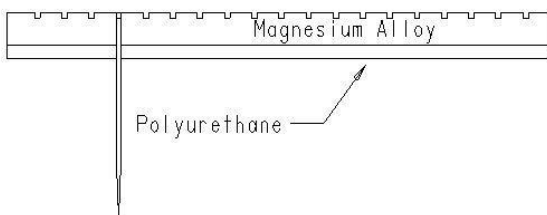


- alongside grooved

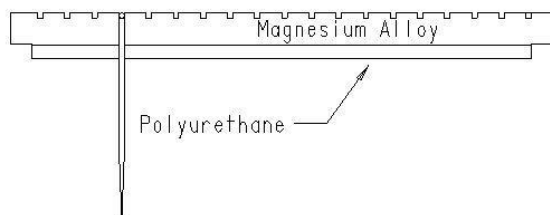


- alongside grooved

- alongside grooved, but only at each needle hole a 7 mm long single groove

Execution and main measurements:

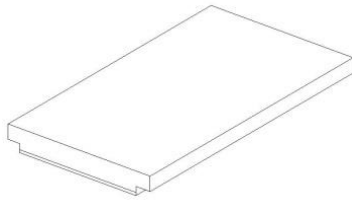

without grooves

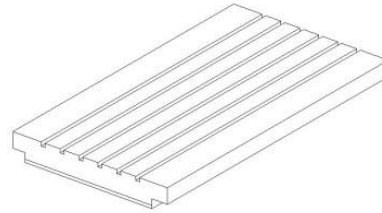


Aluminium covered with soft Polyurethane on needle side

alongside grooved

Main measurements:

L =mm

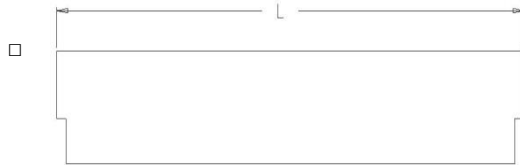

- Aluminium 12 mm
- Aluminium 15 mm

W =mm
 T =mm

W1 =mm
 T1 =mm

Required pictures:

Cross section needle board in the machine



type plate needle loom



